




SLEEK FENCING IS FOR DESIGNERS & DISCERNING HOMEOWNERS WHO WANT TO MAKE THEIR FENCE A FEATURE, AND A STATEMENT THAT LASTS FOR A LIFETIME.

What you will experience when working with SleekFence Aluminum Fencing Systems:

- High grade aluminum extrusions powder coated satin black, lightly textured
- Unique streamlined installation process designed, created and established by fencing professionals with decades of experience
- Manufacturer direct no retail or intermediary markups
- ISO 9000-9001 certified SleekFence manufacturing facilities
- Stunning looks, unrivalled strength and durability
   provides long-lasting value and performance
- No splinters, staining or painting EVER!
- Maintenance free, lifetime fencing impervious to moisture, rotting, warping and termites

Our website, **sleekfence.com** is an excellent resource for information and photos on the quality aluminum fencing products we provide.



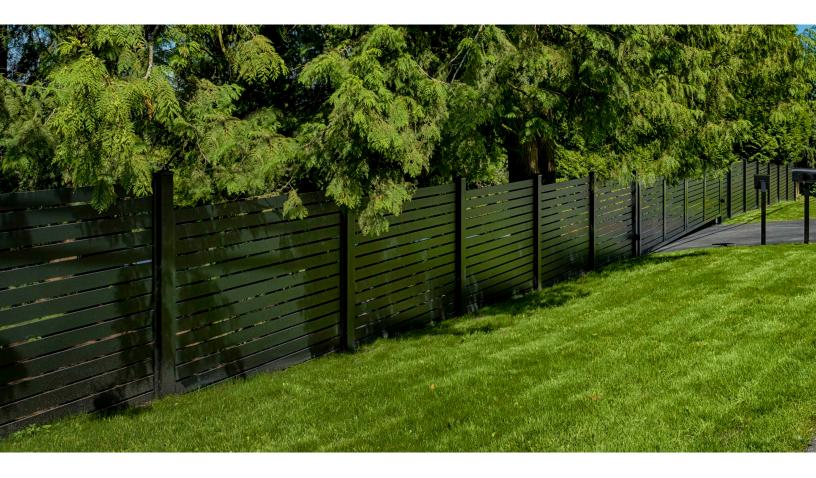

A semi-private modern fence design which will enhance your landscape and secure your property, for a lifetime. Sleek fencing has been developed by fencing experts to work on any property, in any application.

Our slightly textured, satin black finish will make your garden really stand out. If you want to display vivid blooms beautifully, a black fence can work wonders. It creates a versatile canvas to showcase bright flowers in purples, reds, pinks and yellows. Rather than blending in with their surroundings, plants can shine against the dark surface.



Close-up view



Matching pedestrian gate



Sleek, modern lines

Limited Lifetime Warranty

# ALUMINUM SCREEN FENCE PANELS



Constructed from 3.5mm heavy wall 4"x4 posts and ribbed 4" horizontal boards, these fence sections are 6' long and available 4' or 6' high.

This is the last fence you will need to install. Aluminum lasts forever, and our durable powdercoating can withstand decades of exposure to the elements.

Panel mount post & cap



Dig & set or concrete mount post options available




Keylock latches available – please inquire.

Padlock-able latch


Self closing adjustable hinges





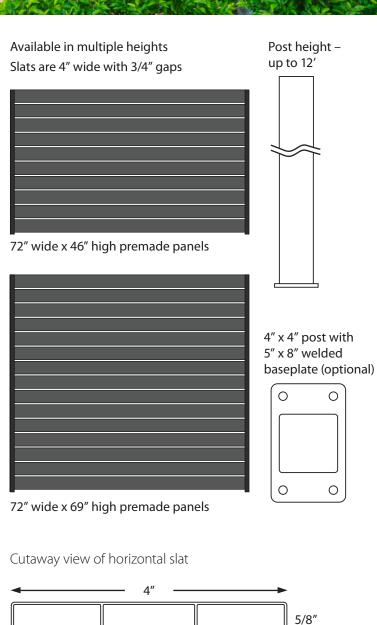



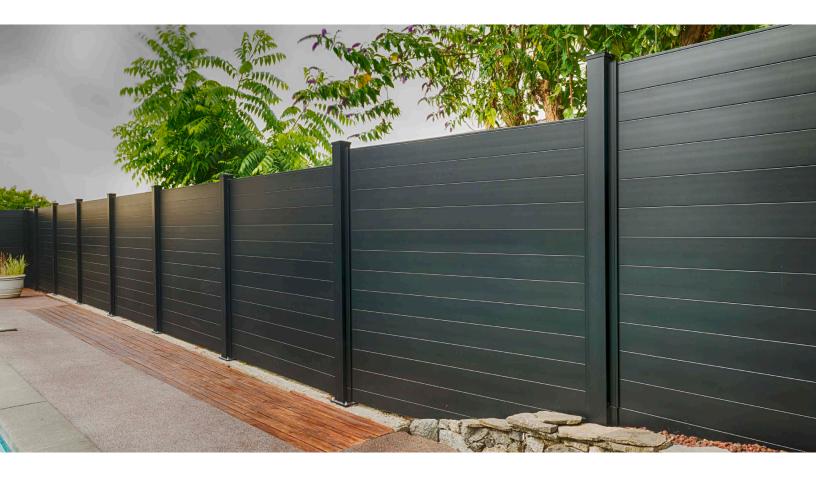

A modern horizontal fence which provides complete privacy and security, for a lifetime. Sleek fencing has been designed by fence experts to work on any property, in any application.


Our slightly textured, satin black finish will make your garden really stand out. If you want to display vivid blooms beautifully, a black fence can work wonders. It creates a versatile canvas to showcase bright flowers in purples, reds, pinks and yellows. Rather than blending in with their surroundings, plants can shine against the dark surface.



Close up view



Matching pedestrian gate

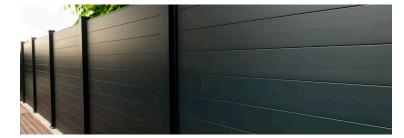

Sleek, modern lines

Limited Lifetime Warranty

## **ALUMINUM PRIVACY PANELS**



Constructed from 3.5mm heavy wall 4"x4 posts and ribbed interlocking horizontal boards, these fence sections are 6' long and available 4' or 6' high.

This is the last fence you will need to install. Aluminum lasts forever, and our durable powdercoating can withstand decades of exposure to the elements.

Panel mount post & cap



Dig & set or concrete mount post options available



Key-lock latches are available. Padlock-able latch




Adjustable self-closing hinges




Available in multiple heights

72" wide x 46" high premade panels




72" wide x 69" high premade panels

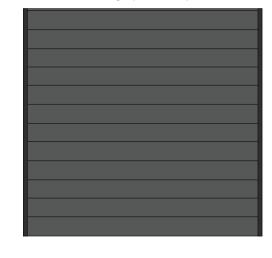

Post height – up to 12'

4" x 4" post with 5" x 8" welded baseplate (optional)



Close-up cutaway view of panel & top cover








### **A) INSTALL POSTS**

### **GENERAL**

All posts are a full 4"x4" wide and 9/64" or 3.5mm thick. 7', 9' or 12' long posts are available for in ground, or concrete wall mount applications. Concrete mount posts come with a welded baseplate as per diagram and picture to the right.

Note: concrete anchors are not included and can be purchased at your local hardware store.

4" x 4" post with 5" x 8" welded baseplate (optional)





## INSTALLATION GUIDE

#### POST PROTECTION

Leave the plastic wrap on the posts until you are ready to install panels.

### POST SPACING FOR 72" WIDE PANELS

Where possible, install fence posts 72.25" to 72.5" apart – between posts, not center to center of posts.

### POST SPACING FOR GATES

Install gate posts 1.5" to 2" wider than the width of the gates – between posts, not center to center of posts.

#### POST DEPTH

For in ground applications, posts must be installed between 22 and 30" deep, set in concrete.

#### SET POST HEIGHT


Using a string line with a line level, or a leveling laser - mark out the finished height of your posts, and cut them to the appropriate height using a circular saw with a fine tooth blade, jig saw, or handheld bandsaw. We recommend the posts stick up above the panels about 3 inches and are capped with our pyramid posts caps for a finished look.

### **B) INSTALL PREFABRICATED PANELS**

### **GENERAL**

All panels come prefabricated, and with what we call an "F" channel. This is what you use to fasten the panels to the posts.

F channel



#### Panel mounted to post



#### PANEL PROTECTION

Cut the plastic open on the left and right sides of the panels but leave it intact until the fence is completed.




#### MOUNT PANELS

Slide an F channel onto the sides of each panel, with the tabs facing the same way – usually to the least visible side of the fence as these are where some fasteners will be visible. Lift the panel into place between posts and screw through the tab on the F channel, into the post – one screw every 18-24" is ample. Ensure the F channel is at the correct height on the post for this step. Next, ensure the panel is flush with the top of the F channels and screw through the F channel into the panel every 18-24 inches to lock it in place. Mount these screws near the edge of the horizontal boards – not on the edge. This will prevent jamming with the internal screws.

#### RESIZING PANELS FOR SHORT SECTIONS

You will likely need to trim some panels down to a shorter length to fit your property. This can be achieved by taking the following steps.

- a. cut the panel down to a width that is ½" less than the space between posts. This will allow space for the end frame, and 2 F channels.
- b. slide the screw cover out of the panel end frame and unscrew all fasteners.
- c. remount the frame back on the cut panel. Simply reuse the fasteners, frame and screw cover. Tap the screw cover back into place gently using a piece of wood to prevent damage.
- d. mount the resized panel to the posts as per instructions above.

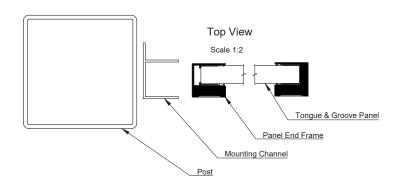



### CREATING TWO VERY SHORT SECTIONS OUT OF ONE 6' LONG PANEL

Some projects will require a few extra short fence panels, for instance beside a gate or at the end of a short segment. To minimize panel infill waste, we have 4' or 6' universal channel sets which include the components required to make a panel. Order two of them if you want to make two short panels out of one premade panel, and follow the instructions above for resizing panels. These channel sets include an F channel, but not extra screws.

## INSTALLATION GUIDE

### CREATING AND INSTALLING CUSTOM GRAVEL BOARDS/KICKBOARD FILLERS UNDER THE FENCE

If your property slopes or has some awkward drop offs along the fence line, you can also utilize our universal channel sets to mount these fillers. Keep in mind you will need extra panels or offcuts from panels to fill these gaps.



### C) INSTALL GATES

### **GENERAL**

These instructions cover the installation of our standard hinges and pad-lockable latches. If you desire a key-lock handle or code lock we highly recommend you hire a professional.

### **GATE PROTECTION**

Keep the plastic wrap on the gates until installation is complete – cut holes in the plastic to mount hinges and latch.

#### POST SPACING FOR GATES

Install gate posts 1.5" to 2" wider than the width of the gates – between posts, not center to center of posts.

### **MOUNT HINGES**

Lay the gate on a table or sawhorses and mount the hinges 6" up from the bottom, and 6" down from the top of the gate, as shown in picture below. Lift the gate to the correct height between posts and shim underneath to keep it stable while screwing in the hinges. Adjust the hinges to ensure the gate is centered, and parallel to the posts. These hinges can also be set up as self-closing using the little pin and adjustor tool.

## MOUNT LATCH

Install the latch as show in the picture below. Once complete you may need to make minor adjustments with the adjustable hinges to optimize the latching mechanism.






Padlock-able latch





Adjustable self-closing hinges



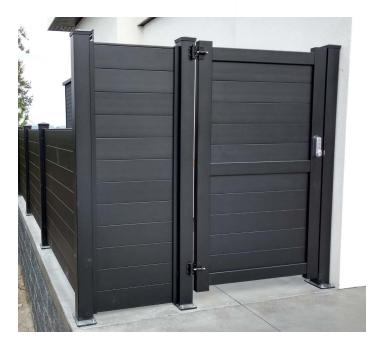

### FENCE AND GATE INSTALLATION SUPPORT TEAM

If at any point you need support with your install, please contact our client care team: 855-875-0855 / support@sleekfence.com



## LIMITED LIFETIME ALUMINUM FENCE WARRANTY

#### WHO IS COVERED AND FOR HOW LONG:

- Privately owned single-family residential properties Twenty (20) years, transferrable
- Corporately owned or commercial properties Ten (10) years

#### WHAT OUR WARRANTY COVERS:

- SLEEK warrants that all aluminum fencing materials and powder coat finishes will be free from defects for the entire duration of the warranty period which takes effect on the date of product delivery to end user.
- SLEEK warrants the product against peeling, cracking, rotting, warping, separating, splintering, corrosion, rusting or any abnormal discoloration/fading under the full range of normal seasonal weather conditions.

#### WHAT OUR WARRANTY DOES NOT COVER:

- Damage to powder coat finish and aluminum fence material resulting from use of chemical to clean, or any other improper cleaning method employed.
- Damage resulting from impact of any physical object whatsoever or soil, green waste or any other debris, waste or other material piled up, built up, leaning or stacked against the fencing.
- Damage resulting from fencing being used as a retaining wall, water diverter or water management.
- Improper storage or handling, incorrect installation, use or attachment of other aluminum products and/or related accessories that are not manufactured, supplied, authorized or recommended by SLEEK.
- Damage caused by events including but not limited to; impact
  of foreign objects, animals, fire, earthquake, flood, lightning, hail,
  hurricane, tornado or other casualty or act of God; movements,
  distortion, collapse or settling of ground or structure on which the
  fence is installed.
- Costs associated with removal/disposal of faulty product, or reinstallation of replacement product. Please see your installation company's warranty, if applicable.

#### HOW YOU SUBMIT A WARRANTY CLAIM:

Contact SLEEK FENCE by email **support@sleekfence.com** and provide a copy of your original purchase receipt and photos of the defective product along with a clear written description of the concerns or defects. If you do not have the ability to email us, please call our support team at (855) 875-0855 and we will gladly discuss options.

#### HOW WE RESOLVE A WARRANTY CLAIM:

If it is determined by SLEEK, in its sole discretion, the product has a manufacturer defect in material, SLEEK will replace with new or equivalent products. If the product is discontinued, SLEEK will repair or replace the product with a product in comparable current market quality and price range.



# SLEEK FENCE CLEANING GUIDE

The powder coat finish on your SLEEK FENCE should be regarded like the surface of your car; DO NOT USE CHEMICALS, COMMON HOUSEHOLD CLEANERS OR DISH SOAP AS DOING SO WILL VOID THE WARRANTY.



To preserve the beautiful powder coat finish on your new SLEEK FENCE and for optimal cleaning results, wash with a basic car wash brush and soap suited for automotive paint. Light pressure washing can be ok for hard-to-reach areas but is not recommended unless absolutely necessary.







## SLEEK FENCE CLEANING GUIDE

Are you trying to get your SLEEKFENCE as clean as possible with the smallest amount of hassle and heartache? When done right, washing your fence can protect its finish, reduce the chance of fading over time and keep it looking great. When done wrong, however, you can end up scratching the powdercoating, dulling the finish, and leaving ugly water spots all over everything.

Check out these five fence wash tips to get the most out of washing your SLEEKFENCE and avoid the most common pitfalls.

## DO CHOOSE THE RIGHT SOAP

One of the most oft-repeated, old-school fence wash tips is to use dish detergent for maximum cleaning power — but this also happens to be perhaps the worst advice you could take when cleaning your SLEEKFENCE. Dish soap is great for dishes, because it's formulated to cut through grease, but those same strong chemicals and detergents will dull/discolour the finish. Always use a soap that has been formulated specifically for cars.

## DON'T LET ANYTHING TOUCH THE GROUND

Did you drop your wash mitt, drying cloth or detailing rag? It's done. Forget about it. Walk away. Well, maybe not that last one, but definitely don't use it again during this wash session. The small particles of dirt and grime it picked up after being in contact with the ground mean it's guaranteed to scratch and spiderweb your finish should you use it before thoroughly machine-washing it. For this reason, it's helpful to keep a supply of extra towels and a mitt or two handy to use should you accidentally drop anything while washing.

# DO USE TWO BUCKETS OR RINSE CAREFULLY BEFOREHAND

In keeping with the same theme, you'll want to rinse your mitt off in between every dip into the suds bucket to clean off the dirt you just removed from your fence. Ideally, you should have two buckets at the ready — one for rinsing your mitt and one for getting a fresh batch of clean, sudsy soap on your mitt to use on the fence. This is one of the best ways to ensure that you don't accidentally scratch the paint while washing your SLEEKFENCE.

# DON'T WASH IN DIRECT SUNLIGHT

We caution against washing your SLEEKFENCE on a bright, sunny day, because one of the keys to a proper cleaning is keeping it wet until it's time for it to be properly and thoroughly dried. If the metal is hot, the water, and even the soap, will dry up quickly because of the sun, which will leave spots all over the finish. Keeping the fence wet with a light drizzle of water or washing in the early evening will prevent spots from forming. It's also important to rinse with an indirect spray instead of a jet blast of water.

## DO USE A MICROFIBER DRYING TOWEL

Household towels made of cotton or polyester are simply too abrasive to be safely used on your fences paint. A microfiber drying towel is softer and more absorbent, which will protect your finish and get the drying job done much faster.

Make sure to take the necessary precautions so your SLEEKFENCE wash leaves your fence looking SLEEK — not scratched or spotted.

